


FIGURE 6
Overhead Service Entrance Facilities

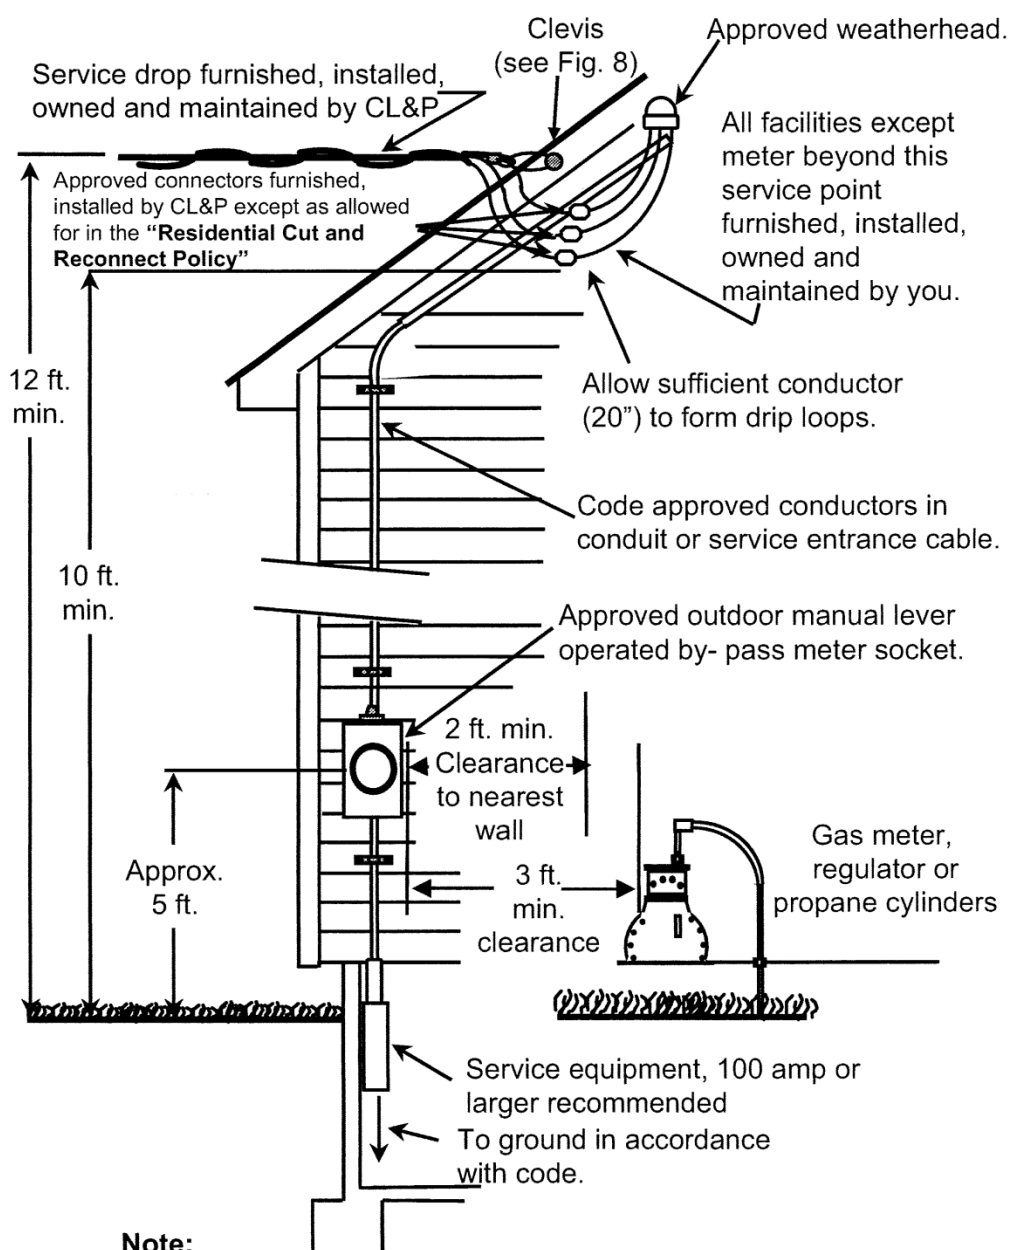

Note:

- A. Electrical contractor must mark stud location for CL&P service wire holder.
- B. For service attachment points exceeding 20 ft. in height contact us.